



CEODEUX
FIRETEC

Manual pneumatic
operated valves for
fixed installations, CO₂
and inert gases



Series
BO430



STANDARD SPECIFICATION

Working pressure p max.	250 bar
Temperature range	- 20°C + 60°C
Seat orifice size	12 mm
Material	
Valve body	brass
Inlet connection	C = 25E EN 629-1
Outlet connection	A = W 21,8 x 1/14" DIN 477
Dip tube connection	G = M 16 x 1
Lever connection	M 10
Burst disc	p = has to be specified



OPTIONS

- Safety pin
- Safety pin and chain
- Gauge connection with closing plug
- Gauge
- Gauge with integrated pressure switch
- Pressure switch
- Manual lever M 10 x 1
- Cable lever M 12
- Pyrotechnical release device
- Closing plug G 3/8"

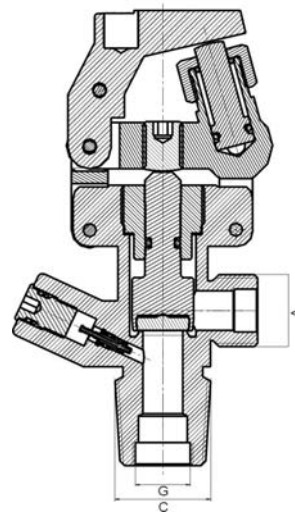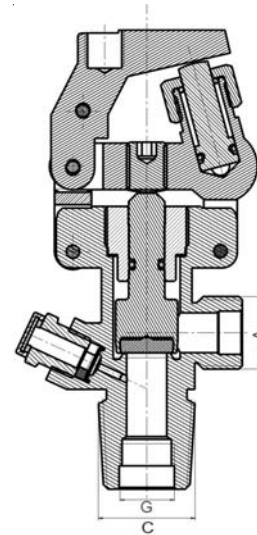

ORDERING

When ordering please specify:

- Series number
- Burst disc pressure "p"
- Options